


SPORTSBRA



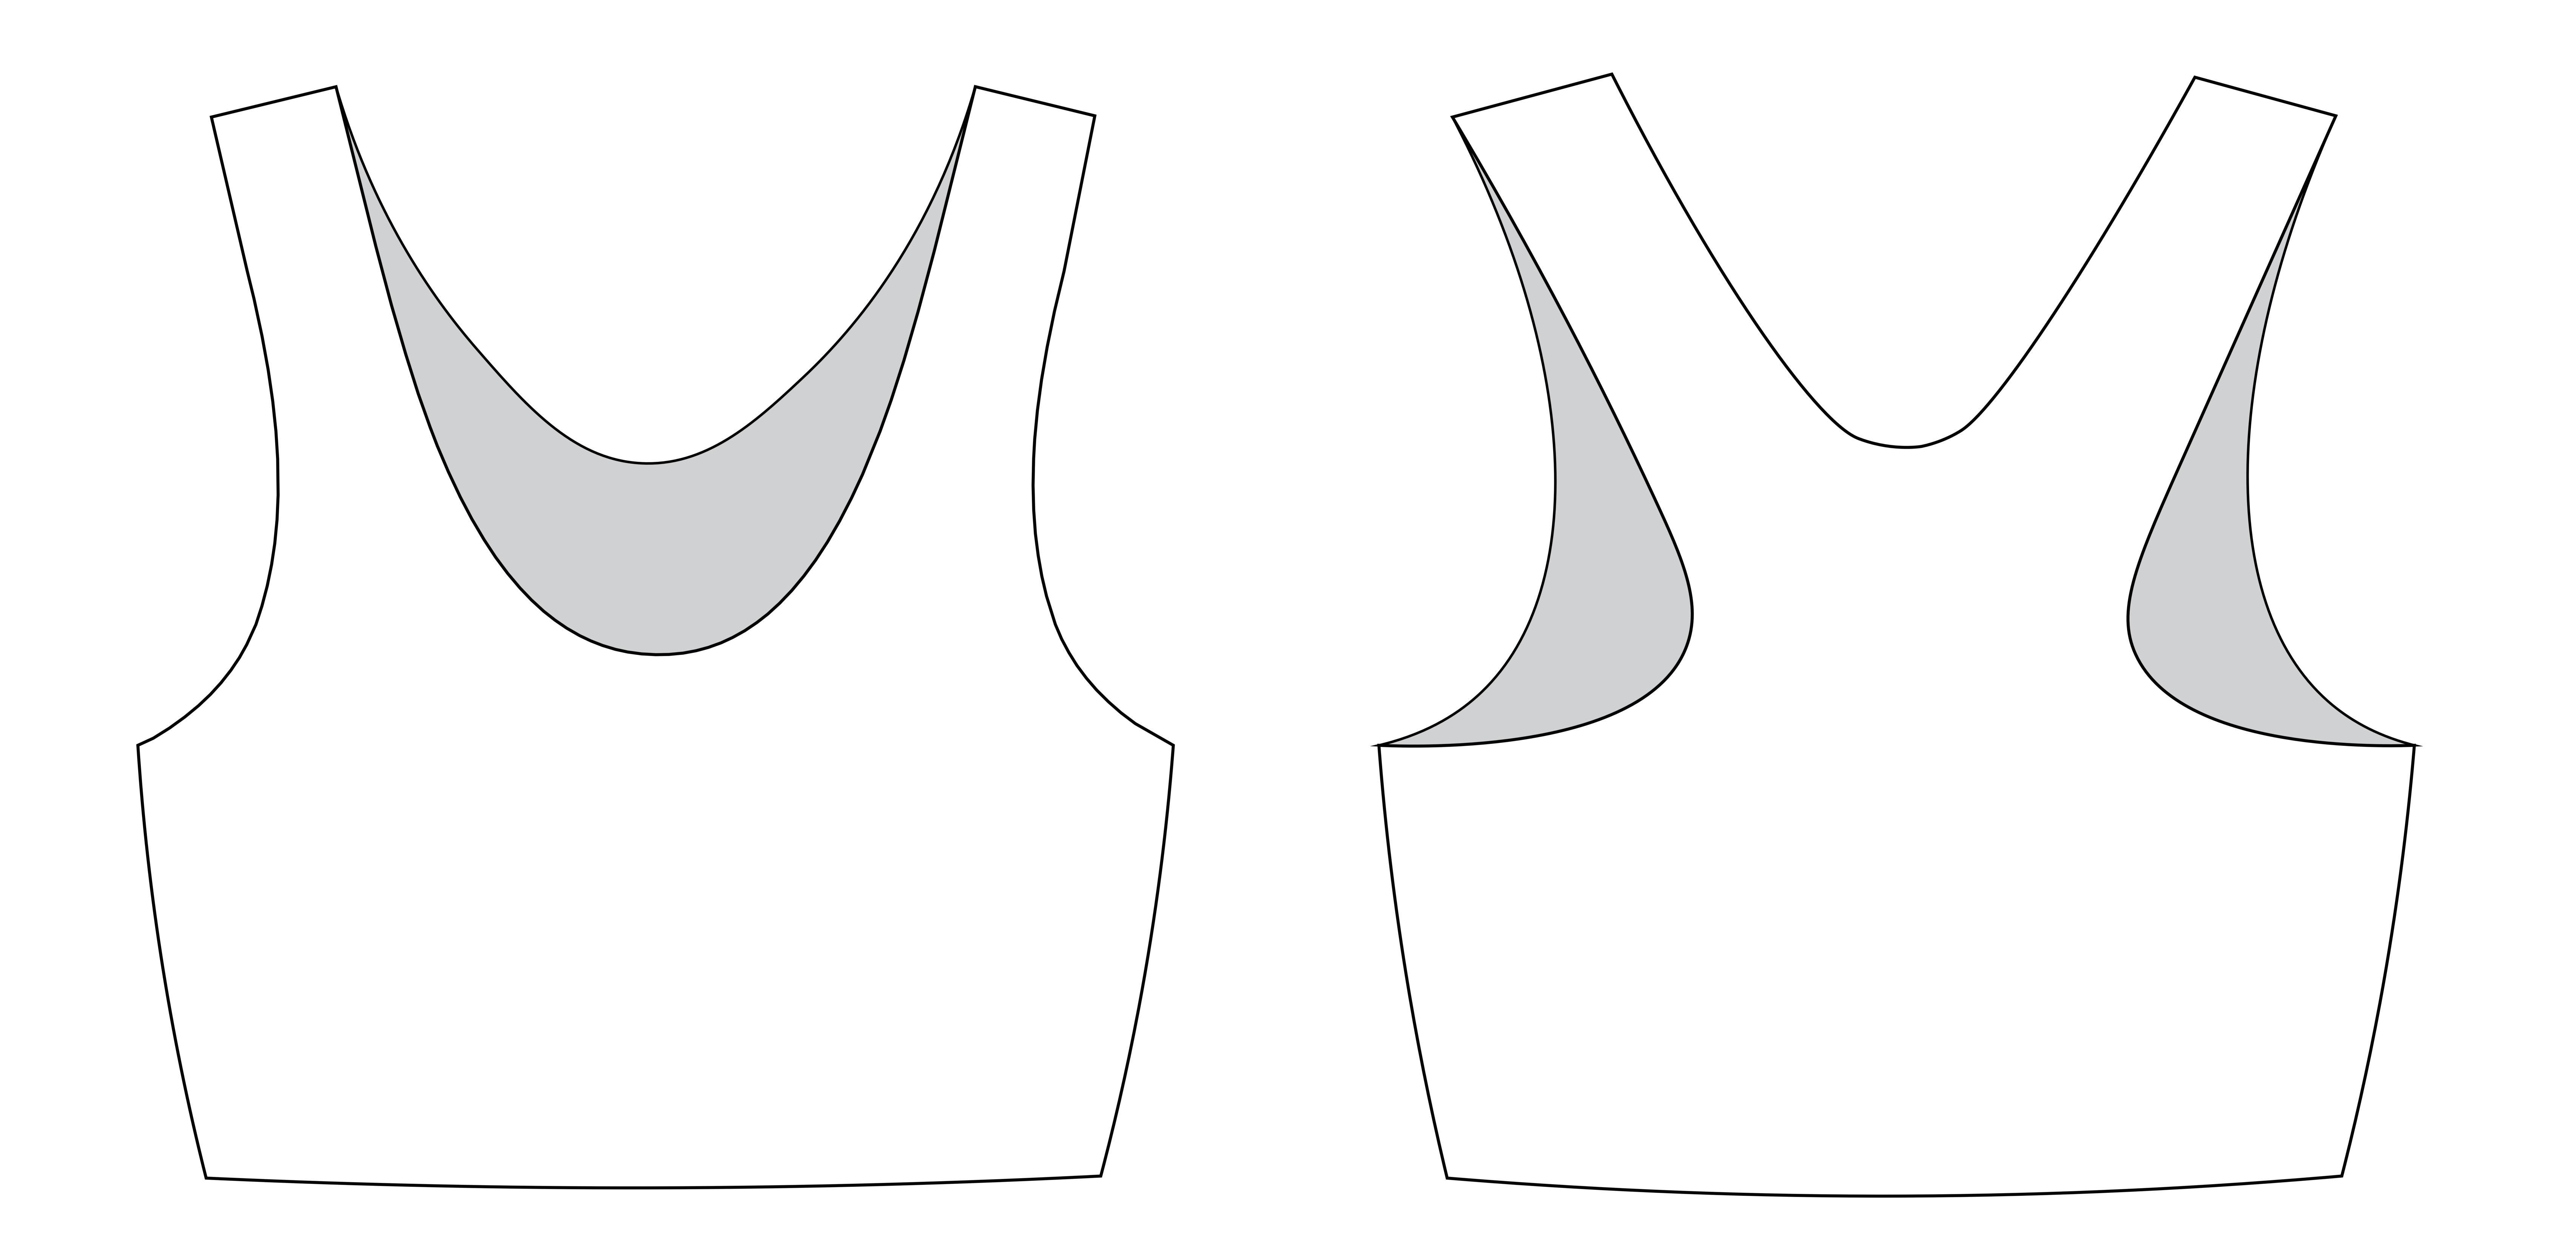

| This visualization serves for preview | Avoid placing artwork across seams. | 2 Pattern samples must be filled with the | BWe recommend placing any logos or | | FLATLOCK SEAM |
|--|--|--|--|--|------------------|
| purposes only, therefore design, logos and | Please work on ARTWORK layer only. | | | | SEAM |
| placement may vary in the final product. | Details that can't be printed are locked. At saving file, turn off visibility for GUIDE layer. | designers at the pre-print process. | area. Anything placed beyond the safe area will run the risk of being cut out. | | PATTERN OUTLINE |
| | | | | | DESIGN SAFE AREA |
| | | | | | GUIDELINES |

Remember that because of the many pieces of each garment, designing for apparel is very different than designing for print media. With the exception of the front zipper, do not cross seams with your designs (i.e., front panel to sleeves, front panel to side panels, shorts side panels to back panel.) Because of size variations and seam allowances, we cannot guarantee that designs that cross seams will align correctly.

1) All artwork should be in vector format, including all sponsor logos and design elements. If you would like to use a photograph or Photoshop image, it must be submitted at 300 dpi at the final print size. 2) Please send in separate files all logos. For maximum quality use vector logos (AI, EPS, PDF), If using raster (pixel based) images please use 300dpi.

3) This artwork serves for visualisation and concept purposes only. It is the customers responsibilty to make sure there are no mistakes in the artwork.

4) Pantone numbers are preferred when specifying colors, but you are welcome to send a color sample if you desire an exact match and no Pantone color is available. Color matching may require additional delivery time for your order. Please note that colors that appear on your screen may look very different when printed on fabric.

5) Convert all text to outlines or supply all fonts used in the design. Also convert all strokes to outlines.

6)Use Pantone Coated colors as spot colors; do not convert to CMYK.

SPORTSWEAROFTOMORROW.COM